


Alpha – Tri Colour Batten Range



Part Number	AL1-40T	AL1-50T	AL1-60T
Rated Voltage	220-240V	220-240V	220-240V
Frequency	50~60Hz	50~60Hz	50~60Hz
Max Power	40W	50W	60W
Operating Temperature	-20 to +40°C	-20 to +40°C	-20 to +40°C
Power Factor	0.9	0.9	0.9
Lifetime	50,000H	50,000H	50,000H
Max Lumens	4400lm	5500lm	6600lm
Colour Temp	3000K 4000K 5000K	3000K 4000K 5000K	3000K 4000K 5000K
Beam Angle	110°	110°	110°
CRI	>80	>80	>80
Type	Flicker Free	Flicker Free	Flicker Free
Dimensions	1200 x 208 x 70mm	1500 x 208 x 70mm	1800 x 208 x 70mm

Product Applications

- Workspaces & offices
- Lobbies/Reception areas
- Schools, Colleges & Universities
- Administrative Centres
- Laboratories

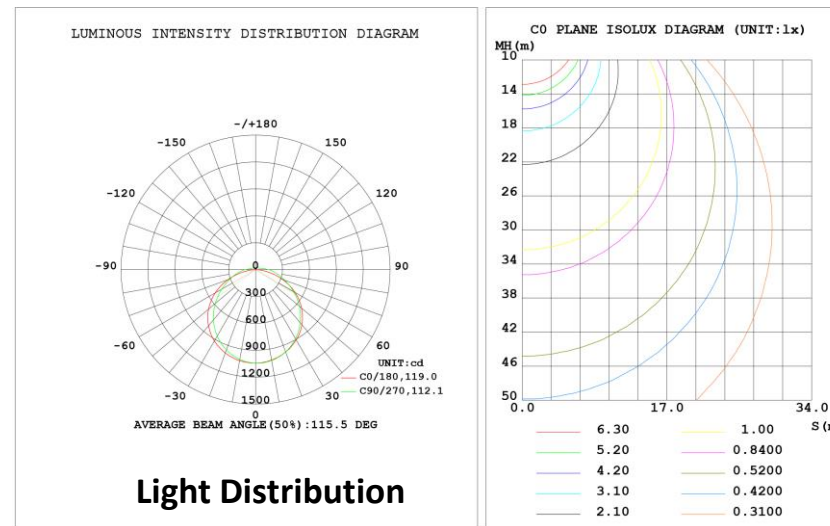


Note: Only use the LED driver supplied with your product (isolated constant current power supply). This is currently not a dimmable product.

* Product can be surface mounted or ask about our suspension kit options.

Installation Instructions

Important: First turn off the power to isolate the Alpha light fitting.

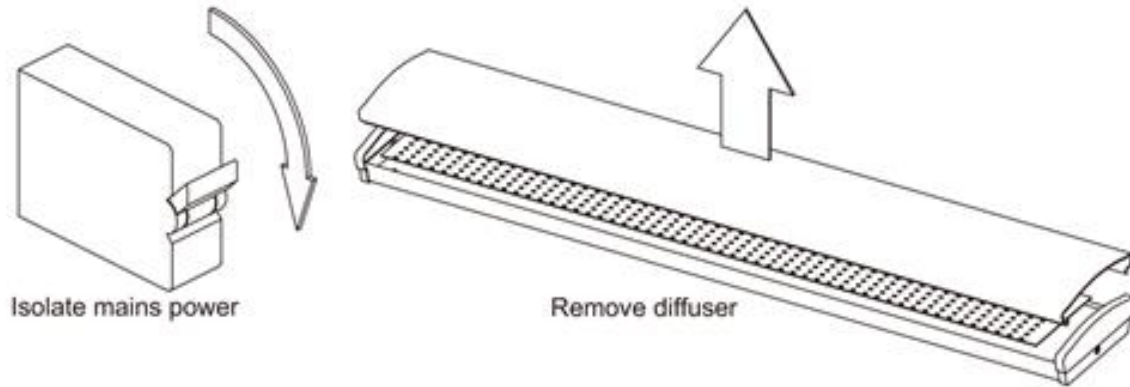

IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution - Risk of electric shock.



This is a class 2 product and must be connected to earth

