


SELENE LED PANEL 600 x 600 - SE1A-36T and SE1B-36T

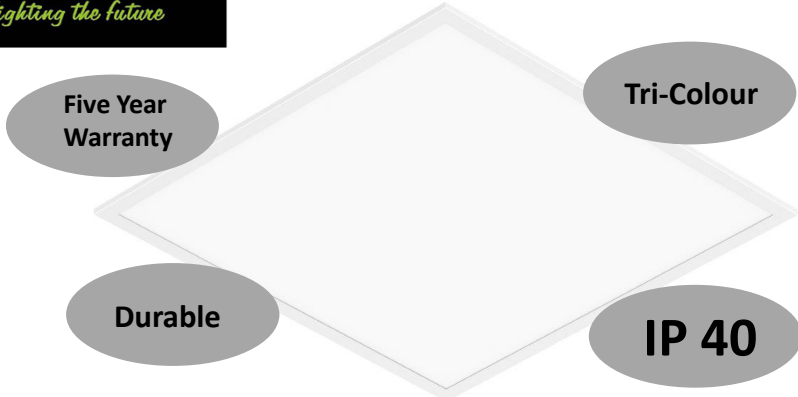

Product Applications:


- Workspaces & offices
- Lobbies/Reception areas
- Schools, Colleges & Universities
- Administrative Centres
- Sports Centres
- Showrooms
- Laboratories

Class II Product

Note: Only use the LED driver supplied with your product. (isolated constant current power supply)

Part Number	SE1A-36T	SE1B-36T
Rated Voltage (V)	220~240	220~240
Frequency (Hz)	50~60	50~60
Max Power	35W	35W
Power Factor	0.9	0.9
Lifetime	50,000H	50,000H
Max Lumens	3500	3500
Colour Temp	3000K, 4500K, 5700K	3000K, 4500K, 5700K
Beam Angle	120°	120°
CRI	>80	>80
Type	Flicker Free	Flicker Free
Dimensions (mm)	595 x 595 x 32	595 x 595 x 32

Installation

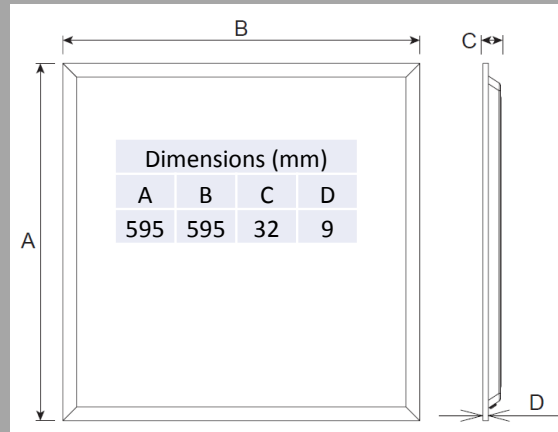

1. Switch the power off.
2. Lift the recessed modular fitting into the ceiling.
3. Wire the led panel driver to the mains.
4. Place the panel into the recessed ceiling and connect the male/female connector.
5. Adjust into place.

This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution - Risk of electric shock

